

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
6 October 2005 (06.10.2005)

PCT

(10) International Publication Number
WO 2005/094136 A1

(51) International Patent Classification⁷: **H05B 37/02**,
37/03

(74) Agent: **DALL'OLIO, Giancarlo**; Invention S.a.s., Via
delle Armi 1, I-40137 Bologna (IT).

(21) International Application Number:
PCT/IB2005/000712

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA,
ZM, ZW.

(22) International Filing Date: 18 March 2005 (18.03.2005)

(25) Filing Language: Italian

(26) Publication Language: English

(30) Priority Data:
BO2004U 000025 23 March 2004 (23.03.2004) IT

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,



(71) Applicant (*for all designated States except US*): **O.C.E.M.
S.P.A.** [IT/IT]; Via 2 Agosto 1980, 11, I-40016 S. Giorgio
Di Piano (IT).

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): **BASILE, Gianluigi**
[IT/IT]; Via Canaletta 68, I-40050 Argelato (IT).

[Continued on next page]

(54) Title: HALF-LEVEL LIGHT SIGNALING DEVICE

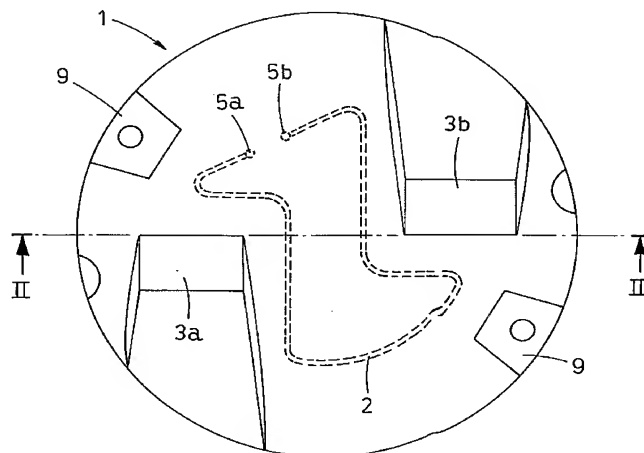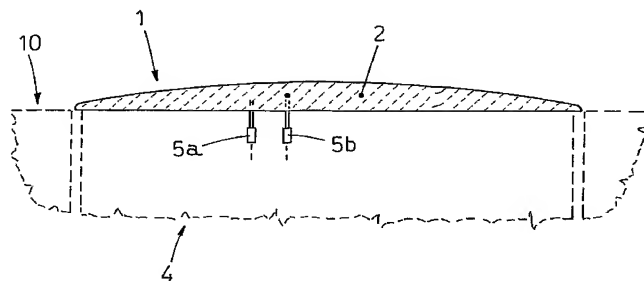

(57) Abstract: Half-level light signaling device is
formed by a casing, including a lower part, which
houses electrical and/or electronic circuits and at least
one light source, and a cap protruding from the ground
and removably fastened to the lower part. The cap has
at least one aperture, to which a prism is connected,
as as to send outwards a light beam produced by the
light source. The signaling device includes at least one
antenna, embedded in the isolating material making
up the cap, and having the terminals accessible from
the lower part of the casing.



SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*